

RECESSED MOUNTED "R1 FRAME" WITH OPAL OR PRISMATIC DIFFUSER



- **Frame** has a rectangular (or square) shape and is equipped with galvanized steel springs for diffuser attachment .
- **Normal (or electronic)** ballast.
- **Battery & battery charger** can be added on request.
- **T8 fluorescent lamps** : 18 w , 36 w.

DIFFUSER TYPES

OPAL DIFFUSER

O : "BLOWN OPAL" diffuser.




PRISMATIC DIFFUSER

P 1 : " BLOWN PRISMATIC " diffuser incorporating internal pyramidal prisms.



LUMINAIRE TYPES & DIMENSIONS

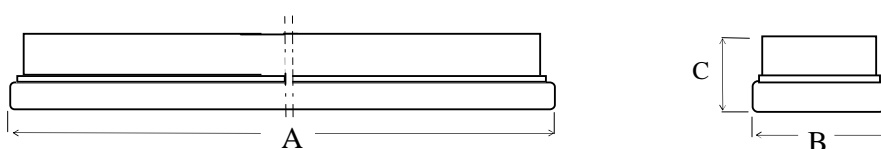

LUMINAIRE TYPE	LAMP (S)	DIMENSIONS		
		A	B	C
2 18 R1	2x18 w T8	640	200	115
4 18 R1	4x18 w T8	650	650	107
1 36 R1	1x36 w T8	1252	103	127
2 36 R1	2x36 w T8	1252	210	110
3 36 R1	3x36 w T8	1252	288	110
4 36 R1	4x36 w T8	1252	362	110

(add diffuser to the luminaire type).

T8 : Ø 26 mm traditional tubular fluorescent lamps.